

WELCOME TO THE FUTURE OF CYBER SECURITY

16000 SECURITY GATEWAY



Ready to battle any threat, from small to the fifth generation large scale and multi-vector attacks, our security gateways provide superior threat prevention and a unified security management. Turbo charge your enterprise with Check Point 16000 Next Generation Firewalls that combine the most comprehensive protections with data center-grade security and hardware to maximize uptime and performance for securing large enterprise and data center environments.



Highest Security Effectiveness

Integrated with R80.30 and ThreatCloud setting a new standard of prevention against advanced 5th generation cyber attacks



State-of-the-Art SSL Inspection

Threat Prevention that delivers lightning fast SSL-encrypted traffic inspection without compromising up time or scalability



1 Tbps of Gen V Performance

Hyperscale ready, high performance threat prevention hardware for the fastest Gen V security gateway in the industry

PERFORMANCE HIGHLIGHTS

Gen II Security: Firewall	Gen III Security: NGFW ¹	Gen V Security: Threat Prevention + SandBlast ²
78.3 Gbps	27 Gbps	16.4 Gbps

Performance measured on the 16000 Turbo model with enterprise test conditions. Additional performance details on page 4. 1. Includes Firewall, Application Control, and IPS. 2. Includes Firewall, Application Control, URL Filtering, IPS, Antivirus, Anti-Bot and SandBlast Zero-Day Protection.

WELCOME TO THE FUTURE OF CYBER SECURITY

16000

Data center grade security, performance and reliability

The Check Point 16000 Next Generation Security Gateway combines the most comprehensive security protections with data center grade hardware to maximize uptime while safeguarding enterprise and data center networks.

The 16000 Turbo model is a 2U Next Generation Security Gateway with four I/O expansion slots for high port capacity, redundant AC power supplies and fans, a 2x 480GB SSD RAID1 disk array, and Lights-Out Management (LOM) for remote management. If you're ready for 25, 40 or 100 GbE, so is the 16000 Next Generation Security Gateway - with its 40 and 100/25 GbE IO card options.

Key Features & Benefits

- Advanced Threat Prevention 1st time prevention of known and zero-day threats
- Uncompromising Performance Achieve up to 16.4 Gbps of threat prevention throughput
- Secure Encrypted Traffic Consolidate SSL inspection into one integrated security platform



THE CYBER SECURITY ARCHITECTURE OF THE FUTURE

Data Center and High-End Enterprise Security Gateways

ONE SECURITY PLATFORM

Leveraging unified threat intelligence and open interfaces

REAL-TIME THREAT PREVENTION

Blocking the most sophisticated attacks before they infiltrate the network


CONSOLIDATED MANAGEMENT

Single management, modular policy management and integrated threat visibility

WELCOME TO THE FUTURE OF CYBER SECURITY

16000 SECURITY GATEWAY


- 1 Console port
- 2 Sync 10/100/1000Base-T RJ45
- 3 2x 480GB SSD RAID1
- 4 USB ports for ISO installation
- 5 Lights-Out Management port
- 6 Management 10/100/1000Base-T RJ45
- 7 Four network card expansion slots

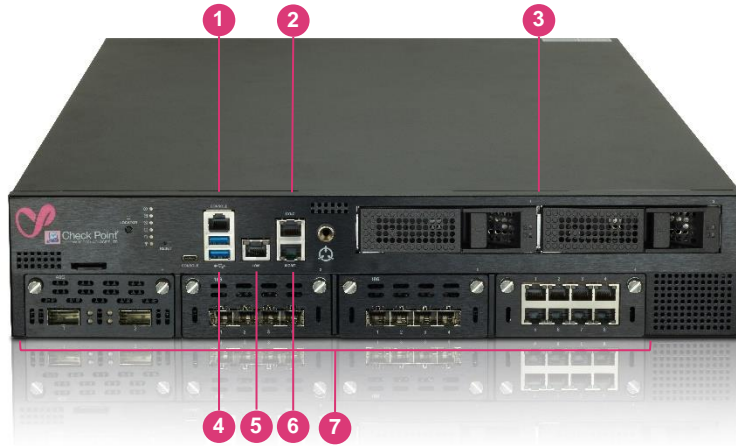

SPOTLIGHT

Prevent Known and Zero-day Threats

Zero-day protection offering network security with evasion-resistant malware detection and complete protection from the most advanced attacks, ensuring quick delivery of safe content to users.

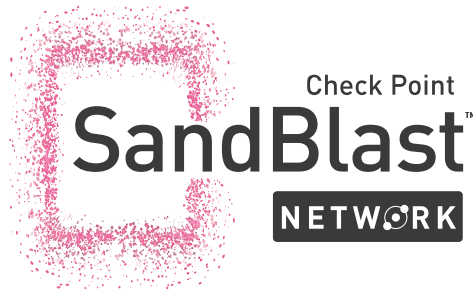

Complete Security: Simple Offering

Flexible cost-effective bundles. Subscription and support offered together for NGFW, NGTP or NGTX (sandboxing) in either direct or collaborative premium support for 1, 3 or 5 years.

Redundant, High Performance

The 16000 Turbo model includes a total of 10x 1 GbE copper ports, two 4x 10 GbE SFP+ interface cards, transceivers, redundant AC power supplies, 2x 480GB SSD drives and 64GB of memory for high connection capacity.



100, 40 and 25 GbE Connectivity

If you're ready to move from 10 to 25, 40 or 100 GbE, so is the 16000 Next Generation Security Gateway. The 16000 Security Gateway lets you connect your 10 GbE server uplinks to your core network.

DATA CENTER GRADE PLATFORM

		1 GbE Copper	1 GbE Fiber	10 GbE	40 GbE	100/25 GbE	Memory	Redundant Storage	Redundant Power	LOM
16000	Turbo	10	0	8	0	0	64 GB	●	●	●
	Maximums	34	16	16	8	8	128 GB	●	●	●

WELCOME TO THE FUTURE OF CYBER SECURITY

Performance**Enterprise Testing Conditions**

- 16.4 Gbps of Threat Prevention¹
- 27 Gbps of NGFW²
- 28.8 Gbps IPS
- 78.3 Gbps of firewall throughput

Ideal Testing Conditions

- 159 Gbps of UDP 1518 byte packet firewall throughput
- 20 Gbps of AES-128 VPN throughput
- 435,000 connections per second, 64 byte response
- 14.6/32M concurrent connections, 64 byte response³

1. Includes Firewall, Application Control, URL Filtering, IPS, Antivirus, Anti-Bot and SandBlast Zero-Day Protection.

2. Includes Firewall, Application Control and IPS. 3. Performance measured with default/maximum memory.

Additional Features**Highlights**

- 2x CPUs, 24 physical cores, 48 virtual cores (total)
- 480GB SSD RAID1 storage, 1TB option
- 2x AC power supplies
- 64 GB memory, 128 GB option
- Lights-Out-Management card is Included
- Virtual Systems (default/max mem): 60/250

Network Expansion Slot Options (2 of 4 slots open)

- 1x 10/100/1000Base-T RJ45 port card, up to 34 ports
- 4x 1000Base-F SFP port card, up to 16 ports
- 4x 10GBase-F SFP+ port card, up to 16 ports
- 2x 40G QSFP+ port card, up to 8 ports
- 2x 100/25G QSFP28 port card, up to 8 ports

Content Security**First Time Prevention Capabilities**

- CPU-level, OS-level and static file analysis
- File disarm and reconstruction via Threat Extraction
- Average emulation time for unknown files that require full sandbox evaluation is under 100 seconds
- Maximal file size for Emulation is 100 MB
- Emulation OS Support: Windows XP, 7, 8.1, 10

Applications

- Use 8,000+ pre-defined or customize your own applications
- Accept, prevent, schedule, and apply traffic-shaping

Data Loss Prevention

- Classify 700+ pre-defined data types
- End user and data owner incident handling

Content Security (continued)**Dynamic User-based Policy**

- Integrates with Microsoft AD, LDAP, RADIUS, Cisco pxGrid, Terminal Servers and with 3rd parties via a Web API
- Enforce consistent policy for local and remote users on Windows, macOS, Linux, Android and Apple iOS platforms

Network**Network Connectivity**

- Total physical and virtual (VLAN) interfaces per appliance: 1024/4096 (single gateway/with virtual systems)
- 802.3ad passive and active link aggregation
- Layer 2 (transparent) and Layer 3 (routing) mode

High Availability

- Active/Active and Active/Passive - L3 mode
- Session failover for routing change, device and link failure
- ClusterXL or VRRP

IPv6

- NAT66, NAT64, NAT46
- CoreXL, SecureXL, HA with VRRPv3

Unicast and Multicast Routing (see SK98226)

- OSPFv2 and v3, BGP, RIP
- Static routes, Multicast routes
- Policy-based routing
- PIM-SM, PIM-SSM, PIM-DM, IGMP v2, and v3

Physical**Power Requirements**

- Single Power Supply rating: 1300W
 - AC power input: 90 to 240V (47-63Hz)
 - Power consumption avg/max¹: AC261W/307W
 - Maximum thermal output AC¹: 1048 BTU/hr.
- ¹. base configuration, up to 800W/2730 BTU/hr. with max config

Dimensions

- Enclosure: 2RU
- Dimensions (WxDxH): 17.4 x 24 x 3.5 in. (442 x 610 x 88mm)
- Weight: 39.7 lbs. (18 kg)

Environmental Conditions

- Operating: 0° to 40°C, humidity 5% to 95%
- Storage: -20° to 70°C, humidity 5% to 95% at 60°C

Certifications

- Safety: UL, CB, CE, TUV GS
 - Emissions: FCC, CE, VCCI, RCM/C-Tick
 - Environmental: RoHS, WEEE, REACH¹, ISO14001¹
- ¹. factory certificate

WELCOME TO THE FUTURE OF CYBER SECURITY

ORDERING 16000 SECURITY GATEWAYS

SECURITY APPLIANCE ¹	SKU
16000 Turbo model configuration: 10x 1GbE copper ports, 8x 10GbE SFP+ ports, 8x SR transceivers, 64GB RAM, 2x 480GB SSD, 2x AC PSU, Lights-Out Management (LOM), 5 Virtual Systems.	CPAC-SG16000-TURBO

¹ 1, 3 and 5 year NGFW, NGTP and SandBlast (NGTX) packages with Direct Premium support are available in the online product catalog.

Accessories

INTERFACE CARDS AND TRANSCEIVERS	
8 Port 10/100/1000 Base-T RJ45 interface card	CPAC-8-1C-C
4 Port 1000Base-F SFP interface card; requires additional 1000Base SFP transceivers	CPAC-4-1F-C
SFP transceiver module for 1G fiber ports - long range (1000Base-LX)	CPAC-TR-1LX-C
SFP transceiver module for 1G fiber ports - short range (1000Base-SX)	CPAC-TR-1SX-C
SFP transceiver to 1000 Base-T RJ45 (Copper)	CPAC-TR-1T-C
4 Port 10GBase-F SFP+ interface card	CPAC-4-10F-C
SFP+ transceiver module for 10G fiber ports - long range (10GBase-LR)	CPAC-TR-10LR-C
SFP+ transceiver module for 10G fiber ports - short range (10GBase-SR)	CPAC-TR-10SR-C
10G Direct Attach Copper (DAC) Cable, one meter (10BASE-CU)	CPAC-DAC-10G-1M
10G Direct Attach Copper (DAC) Cable, three meters (10BASE-CU)	CPAC-DAC-10G-3M
2 Port 40G QSFP+ interface card	CPAC-2-40F-C
QSFP+ transceiver module for 40G fiber ports - short range (40GBase-SR)	CPAC-TR-40SR-QSFP-300m
QSFP+ transceiver module for 40G fiber ports - long range (40GBase-LR)	CPAC-TR-40LR-QSFP-10Km
Bi-directional QSFP+ transceiver for 40G fiber ports - short range (40GBase-SR-BiDi)	CPAC-TR-40SR-QSFP-BiDi
40G Direct Attach Copper Cable, one meter (40BASE-CR4)	CPAC-DAC-40G-1M
40G Direct Attach Copper Cable, three meters (40BASE-CR4)	CPAC-DAC-40G-3M
2 Port 100/25G QSFP28 interface card	CPAC-2-100/25F
SFP28 transceiver module for 25G fiber ports with QSFP28 adaptor - short range (25GBase-SR)	CPAC-TR-25SR-ADP
SFP28 transceiver module for 25G fiber ports with QSFP28 adaptor - long range (25GBase-LR)	CPAC-TR-25LR-ADP
QSFP28 transceiver module for 100G fiber ports - short range (100GBase-SR4)	CPAC-TR-100SR
QSFP28 transceiver module for 100G fiber ports - long range (100GBase-LR4)	CPAC-TR-100LR
100G Direct Attach Copper Cable, three meters	CPAC-DAC-100G-3M
MEMORY	SKU
Memory upgrade kit from 64GB to 128GB for 16000 Security Gateways	CPAC-RAM64GB-16000
SPARES AND MISCELLANEOUS	SKU
480GB SSD for 16000/26000 Security Gateways	CPAC-SSD-480G-C
1TB HDD for 16000/26000 Security Gateways	CPAC-HDD-1T-C
AC power supply for 16000 Security Gateways	CPAC-PSU-AC-16000
Replacement Lights-Out Management Module	CPAC-LOM-C
Replacement Fan	CPAC-FAN-16000
Slide rails for 16000 Security Gateways (22" - 32")	CPAC-RAIL-L
Extended slide rails for 16000 Security Gateways (24" - 36")	CPAC-RAIL-EXT-L